
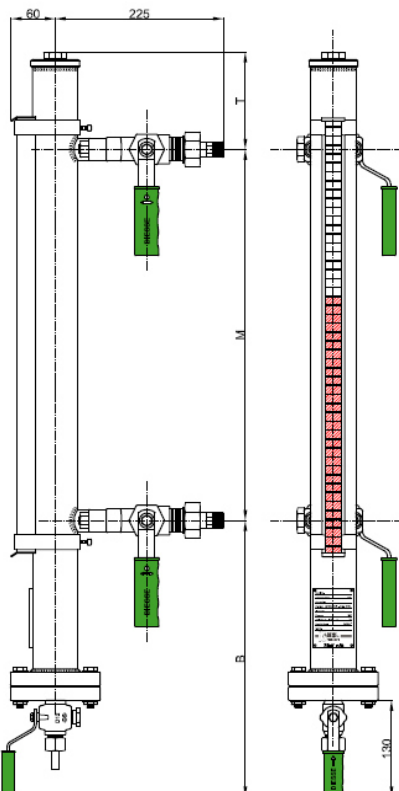


## MAGNETIC LEVEL GAUGE

PN16 and PN25 / Class 150

DS MG - DS BP

Code: DS MG - DSBP - 1/2" GAS-M - M...- SS/SS/.../SS

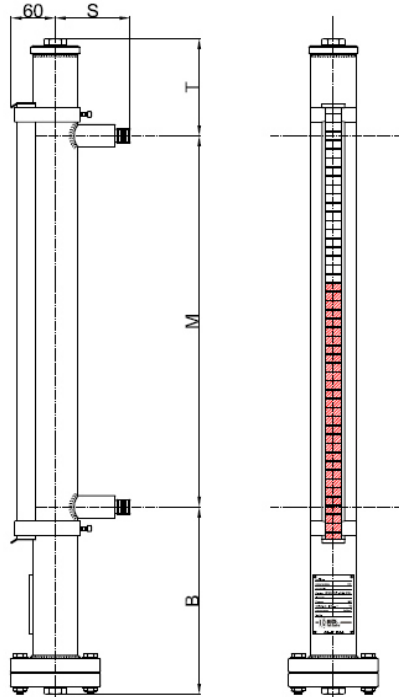

### Technical data

#### Service conditions

Pressure: PN16 / PN25 / Class 150  
 Temperature: up to 300°C  
 Specific weight:  $\geq 0,6 \text{ g/cm}^3$

#### View

Standard: adjustable on 360° in the installation phase

#### Distance M (Centre-to-centre)

On request, distances up to 5.600 mm in one sole piece (Fixed distance, not adjustable)  
 Option: On request distances over 5.600 mm (Execution in several pieces)

#### Materials (Standard)

Main chamber: Stainless steel 316L ( $\varnothing 60,3 \times 2 \text{ mm}$ )  
 Float: Stainless steel 316L ( $\varnothing 50 \text{ mm}$ )  
 Titanium Grade 2 ( $\varnothing 50 \text{ mm}$ )  
 Process connections: Stainless steel 316L (flanged, threaded pipes, butt weld pipes)  
 With shut-off cocks in carbon steel ASTM A105 or stainless steel 316L  
 Rollers: Brass with red and white epoxy paint, anodised aluminium housing, glass cover  
 Stainless steel red and white, anodised aluminium housing, glass cover (Execution for high temperature)  
 Options: roller display housing with stainless steel cover

#### Gaskets

Standard: graphite/AISI 316 Options: PTFE/AISI 316

#### Process connections

Standard flanges:	UNI PN16/40 DN15-20-25	ANSI #150/RF DN 1/2" - 3/4" - 1"
Standard threaded pipes:	BSP-M 1/2" - 3/4" - 1"	NPT-M 1/2" - 3/4" - 1"
	BSP-F 1/2" - 3/4" - 1"	NPT-F 1/2" - 3/4" - 1"
Standard butt weld pipes:	BW 1/2" - 3/4" - 1"	SW 1/2" - 3/4" - 1"

Options: further connections type or connections with cocks (See details at page 2.13 and 2.14)

**Vent:** Standard: threaded 1/2" with plug Options: On request, with flange or with cock (See details at page 2.13 and page 2.14)

**Drain:** Standard: threaded 1/2" with plug Options: On request, with flange or with cock (See details at page 2.13 and page 2.14)

#### Process connections with shut-off cocks: (See details at page 2.13 and page 2.14)

Cocks DS GR18: cylindrical plug type - Straight type - Quick 90° closing  
 Valves DS SHV: globe type - Opening/Closing by handwheel

#### Dimensions

B = Distance depending on the specific weight of the fluid  
 T = 130 mm (Standard); Option: on request  
 S = 100 mm (Standard); Option: on request

#### Accessories

Shut-off cocks (See details from page 2.13)  
 Drain cock (See details from page 2.13)  
 Vent cock (See details from page 2.13)  
 Calibrated scale (See details from page 2.14)  
 Magnetic switches (See details from page 2.15)  
 Level transmitter (See details from page 2.29)

#### Weights

Magnetic level gauge: Kg. 10,0 approx. (with centre-to-centre 1.000 mm and threads 1/2" BSP-M)  
 Cocks DS GR18: Kg. 3,8 approx. (with threads 1/2" BSP-M)  
 Valves DS SHV: Kg. 8,8 approx. (with threads 1/2" BSP-M)

#### Spare parts

For routine maintenance are not necessary spare parts.  
 For cocks and valves see from page 1.72 of the catalogue relative to the glass level gauges.